

# TURNBUCKLE


A-FIG 68	Plain
A-FIG 68Z	Zinc
A-FIG 68H	HDG

**FUNCTION:** Designed as an adjustable hanger rod connection. Tapped right hand and left hand thread.

**APPROVALS:** Complies with Manufactures' Standardization Society (MSS) SP-58 & SP-69 (Type 13). Complies with Federal Specifications A-A-1192A (Type 13).

**MATERIAL:** Forged Steel

**FINISH:** Available in Plain, Zinc Electro-Galvanized, Hot-Dip Galvanized

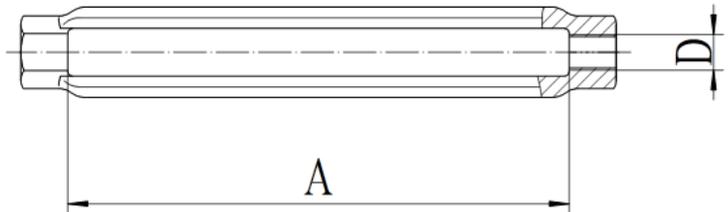

Rod Size D	Specification Data	Rec. Max. Load (lbs.)	Approx. Wt. Per 100 (lbs.)
	A		
3/8	6	730	42
1/2	6	1350	65
5/8	6	2160	98
3/4	6	3230	145
7/8	6	4480	185
1	6	5900	260
1 1/4	6	9500	445
1 1/2	6	13800	640
1 3/4	6	18600	1100
2	6	24600	1490
2 1/4	6	32300	1960
2 1/2	6	39800	2690

This specification sheet is for reference only. Aimco International Group Corp. reserves the right to make changes to the design without prior notice.