

STAMPED C-CLAMP


A-FIG 201Z	Zinc
A-FIG 201SS	SS

FUNCTION: Designed for attaching hanger rod to the bottom flange of a beam or bar joist, where the beam flange thickness does not exceed 3/4". The hanger rod should make contact with the beam flange to ensure full engagement.

APPROVALS: Complies with Manufactures' Standardization Society (MSS) SP-58 & SP-69 (Type 23). Compiles with Federal Specification A-A-1192A (Type 23).

MATERIAL: Available in Carbon Steel with hardened steel cup set screw, and Stainless Steel with stainless steel cup set screw.

FINISH: Available in Zinc Electro-Galvanized and Stainless Steel

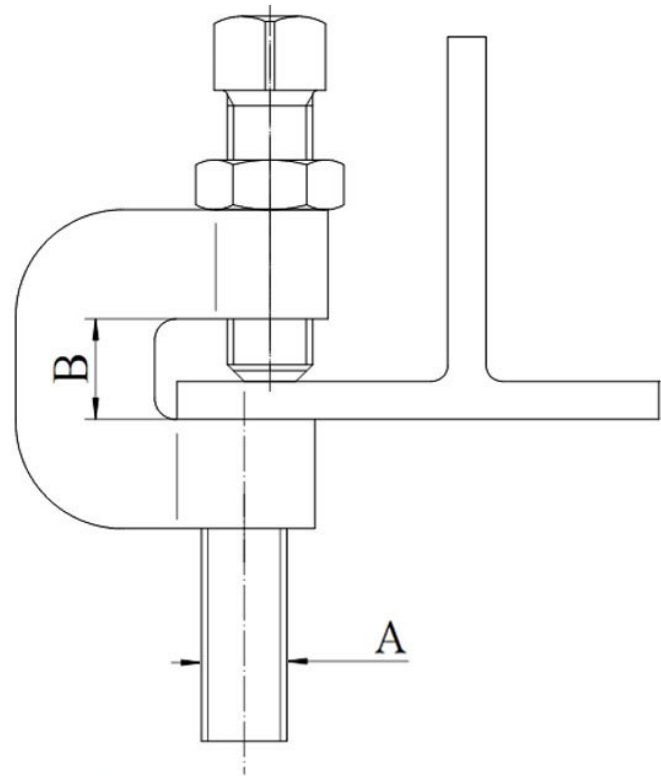

Rod Size A	Specification Data	Rec. Max. Load (lbs.)	Approx. Wt. Per 100 (lbs.)
	B		
3/8	3/4	400	41
1/2	3/4	500	42
5/8	3/4	550	60
3/4	3/4	630	68
7/8	3/4	700	188

This specification sheet is for reference only. Aimco International Group Corp. reserves the right to make changes to the design without prior notice.