

A-SBC

Pre-Galv

STAMPED BEAM CLAMP TOP MOUNT


FUNCTION: Designed to allow structural attachment to metal beams, bar joist, channel, or angle iron in top mount position only, unless used on a parallel flange. The flange must be at least 3/16" thick and does not exceed 3/4".

APPROVALS: Complies with Manufactures' Standardization Society (MSS) SP-58 & SP-69 (Type 19). Complies with Federal Specifications A-A-1192A (Type 19).

MATERIAL: Carbon Steel

FINISH: Pre-Galvanized

NOTE: Set screw must contact the sloped side of the I-beam, channel, or other applicable building structure. Clamp must always be installed in top orientation with the arrow mark on clamp pointing up, unless used on a parallel flange. On parallel flange surfaces, the clamp may be attached to the upper or lower flange but must be in the top orientation. When a torque wrench is unavailable, the set screw should be tightened so it contacts the I-beam, and then an additional 1/4" to 1/2" turn added.

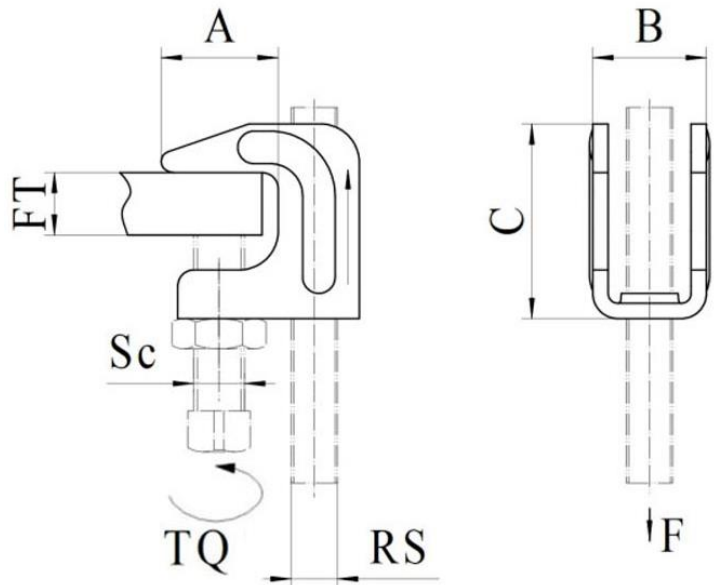

Rod Size RS	Flange Thickness FT	Specification Data					Rec. Max. Load F (lbs.)	Approx. Wt. Per 100 (lbs.)
		A	B	C	Screw Dia. SC	Torque TQ (ft lb)		
3/8	3/4 Max	0.925	0.85	1.58	3/8	5	500	20

This specification sheet is for reference only. Aimco International Group Corp. reserves the right to make changes to the design without prior notice.