


ALL THREADED ROD

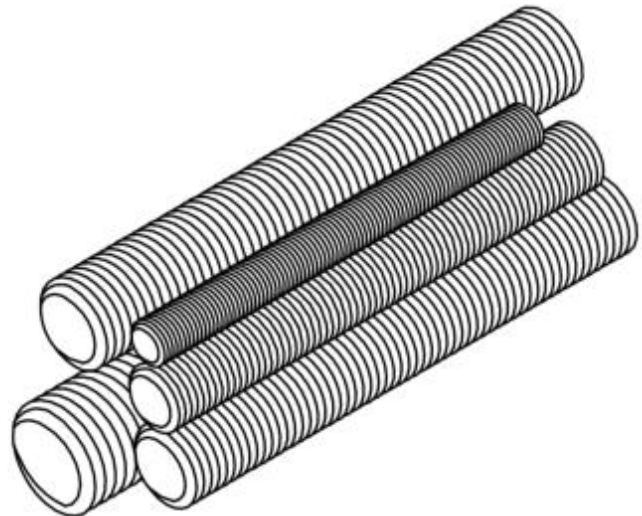

A-FIG 54	Plain
A-FIG 54Z	Zinc
A-FIG 54H	HDG
A-FIG 54SS	SS

FUNCTION: Designed for attaching hangers to structural attachments.

APPROVALS: Complies with the requirements of ASTM A307 Grade A Specifications, Class 2 Thread.

MATERIAL: Mild Steel (C1008-C1020) – Grade 2

FINISH: Available in Plain, Zinc Electro-Galvanized, Hot Dipped Galvanized, Stainless Steel

Size	Specification Data			Approx. Wt. Per Ft. (lbs.)
	Threads Per Inch	Rec. Max. Load 343°C (lbs.)	Rec. Max. Load 399°C (lbs.)	
1/4	20	240	-	0.12
5/16	18	400	-	0.19
3/8	16	730	572	0.29
1/2	13	1350	1057	0.53
5/8	11	2160	1692	0.84
3/4	10	3230	2530	1.22
7/8	9	4480	3508	1.69
1	8	5900	4620	2.23

This specification sheet is for reference only. Aimco International Group Corp. reserves the right to make changes to the design without prior notice.