

A-363	Plain
A-363Z	Zinc


ADJUSTABLE CENTER LOAD BEAM CLAMP WITH J BOLT

FUNCTION: Designed to be used in the suspension of a hanger rod from an I-beam. The clamp is adjustable from 3 1/2" to 8", and can be used with flange thickness up to 3/4".

APPROVALS: Complies with Manufactures' Standardization Society (MSS) SP-58 & SP-69 (Type 27). Complies with Federal Specifications A-A-1192A (Type 27).

MATERIAL: Carbon Steel

FINISH: Available in Plain and Zinc Electro-Galvanized

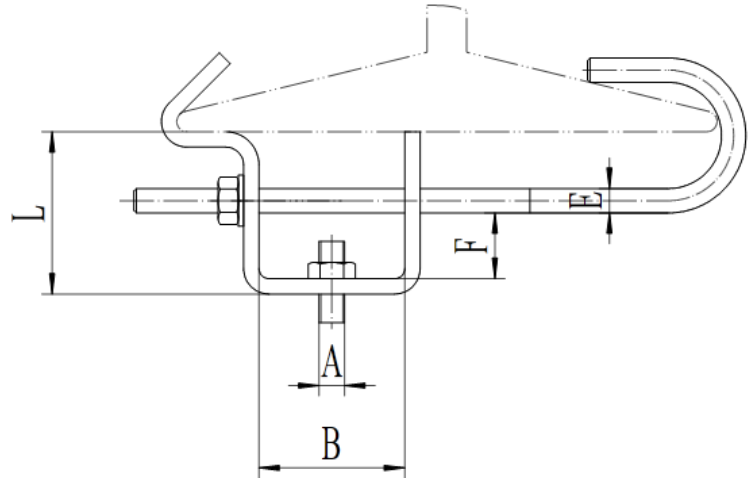

Rod Size A	Flange Width		Specification Data					Rec. Max. Load (lbs.)	Approx. Wt. Per 100 (lbs.)
	Min.	Max.	B	E	F	L	Material		
3/8	3 1/2	8	2	3/8	1	2 3/4	3Ga x 1 1/4	300	98
1/2	3 1/2	8	2	1/2	15/16	2 3/4	3Ga x 1 1/2	700	138
5/8	3 1/2	8	2	5/8	7/8	2 3/4	3Ga x 1 3/4	1000	186

This specification sheet is for reference only. Aimco International Group Corp. reserves the right to make changes to the design without prior notice.