

A-BC26

Zinc

UNIVERSAL BEAM CLAMP WITH TAPPED HOLE


FUNCTION: Designed to attach 1/4" hanger rod from metal beams, channels, or angle iron. One through hole for easier installation of threaded rod.

APPROVALS: Complies with Manufactures' Standardization Society (MSS) SP-58 & SP-69 (Type 19). Complies with Federal Specifications A-A-1192A (Type 19).

MATERIAL: Malleable Iron

FINISH: Zinc Electro-Galvanized

NOTE: Set screw must be tightened and torqued onto the sloped side of the I-beam. Recognizing that torque wrenches are generally not used or available on many job sites, the set screw should be tightened so it contacts the I-beam, and then an additional 1/4" to 1/2" turn added.

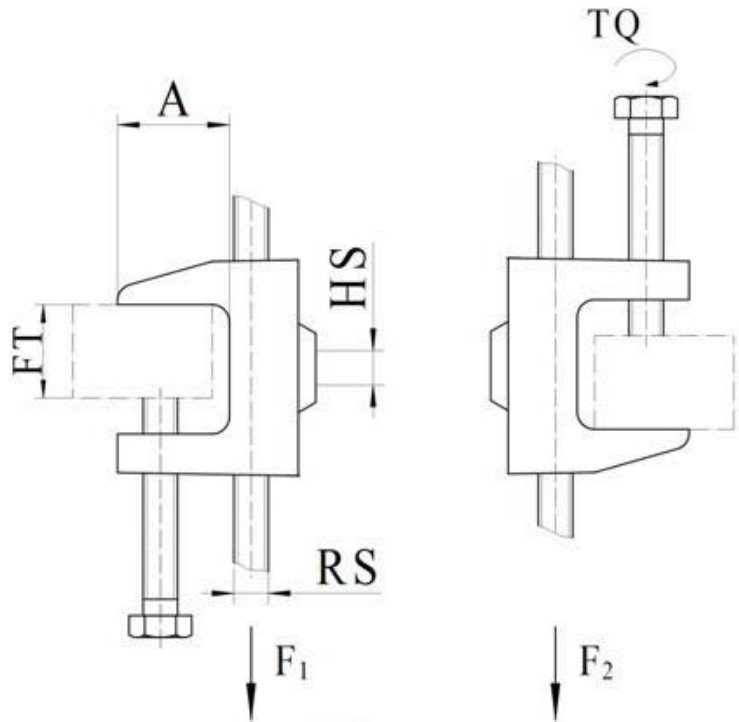

Rod Size RS	Flange Thickness FT	Specification Data				Rec. Max. Load F1 (lbs.)	Rec. Max. Load F2 (lbs.)	Approx. Wt. Per 100 (lbs.)
		A	Hole Size HS	Screw Dia.	Torque TQ (ft lb)			
1/4	13/16 Max	13/16	1/4	1/4	4	250	100	18

This specification sheet is for reference only. Aimco International Group Corp. reserves the right to make changes to the design without prior notice.